


JUMPFLEX - 857-819 mV Signal Conditioner

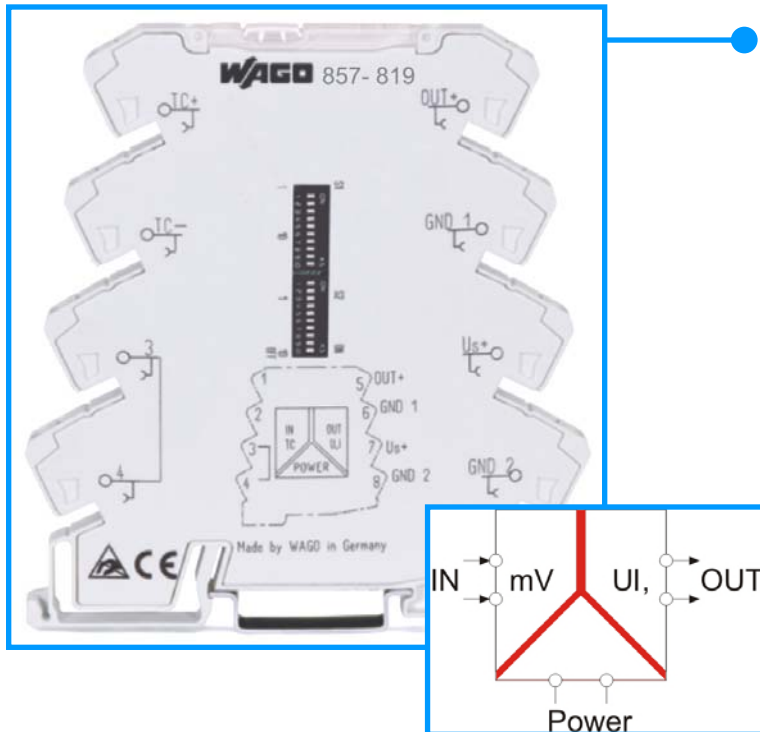

Features / Benefits

- Bipolar mV Input (-100mV up to 1000mV)
- Voltage or current output (i.e. 4-20mA; 0-10VDC)
- Configurable via DIP-switch and software (FDT / DTM)
- Compact 6mm housing

Competitive Advantages

- Temperature range -25...+70°C
- Test voltage 2.5 kV
- Configurable via software



Availability /Approvals

- In Stock
- List Price \$ 202.44
- CE, UL, and GL (pending)

Applications

- Configuration of non-linear curves via software
- Wide range of applications - i.e. Lambda sensors (oxygen sensor), current shunt resistors, strain gauge pressure sensors, etc.